

**Drawing Legend**

- AG AGRICULTURAL PIPE
- DHU DUCTED HEATING UNIT
- DP DOWNPIPE
- EXG EXISTING
- FGL FINISHED GROUND LEVEL
- LPD LEGAL POINT OF DISCHARGE
- NGL NATURAL GROUND LEVEL
- OF OVERFLOW
- RL RELATIVE LEVEL
- SP SEWER PIPE
- TC TERRACOTTA
- TPZ TREE PROTECTION ZONE
- UG UNDERGROUND
- VP VENT PIPE

**Tree Protection Zone (TPZ)**

IN ACCORDANCE WITH TOWN PLANNING CONSENT (P637/2007), THE BUILDER IS TO PROVIDE A TREE PROTECTION ZONE ALONG THE CANOPY LINE OF THE TREES NOMINATED ON THIS DRAWING. THE TPZ IS TO BE INSPECTED AND APPROVED BY THE LOCAL AUTHORITY'S ARBORIST PRIOR TO THE COMMENCEMENT OF WORKS ONSITE.

TPZ TO CONSIST OF THE FOLLOWING:  
 - 1200 x 5000 CHAIN WIRE FENCE;  
 - 1800mm ROBUST POSTS SPACED AT 3-4m INTERVALS;  
 - HIGH VISIBILITY TAPE ALONG THE TOP OF FENCE;  
 - REMOVAL OF WEEDS WITHIN TPZ;  
 - 100mm WOODCHIP MULCH THROUGHOUT TPZ; AND  
 - SIGNAGE PROVIDED BY ARCHITECT.


AS OUTLINED IN THE ARCHITECTURAL SPECIFICATION:  
 SECTION 04 - SITE PREPARATION

In accepting and utilising this document, the recipient agrees that Steven Wallis and Richard Peterson Architect retain all common law, statutory law and other rights including copyright and intellectual property rights. The recipient agrees not to use this document for any purpose other than its intended use, to waive all claims against Steven Wallis and Richard Peterson Architect resulting from unauthorised changes, or to reuse the document on other projects without the prior express written consent of Steven Wallis and Richard Peterson Architect. Under no circumstances shall transfer of this document be deemed a sale.

The Builder/Contractor shall verify dimensions prior to any work commencing. Figured dimensions shall take precedence over scaled work.

**FOR CONSTRUCTION**

**Key Plan**

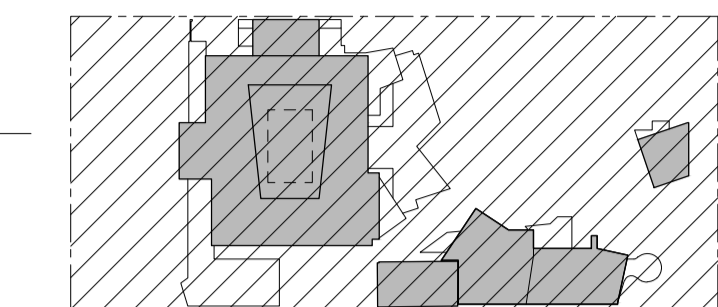

Rev. No.	Date	Revision Details	By
01	23/07/08	PRELIMINARY - CLIENT APPROVAL	SW
02	16/04/09	PRELIMINARY - STRUCTURAL ISSUE	SW
03	18/02/10	GENERAL REVISIONS - DRAWING PREVIOUSLY NUMBERED: DD-002	SW
04	31/01/11	GENERAL REVISIONS - CLIENT REVIEW DRAWING PREVIOUSLY NUMBERED: DD-002	SW
05	19/02/12	GENERAL REVISIONS - DRAFT TENDER ISSUE	SW
06	30/10/12	GENERAL REVISIONS TO LANDSCAPE TENDER ISSUE	SW
07	22/07/13	GENERAL REVISIONS - BUILDING PERMIT ISSUE	SW
A	03/08/13	CONSTRUCTION ISSUE	SW

**Notes**  
 THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE ARCHITECTURAL SPECIFICATION AND ALL RELEVANT CONSULTANT'S DOCUMENTS

**Site Survey Notes**  
 LEVELS AND SURVEY INFORMATION ARE REPRESENTED AS PER LAWLOR & LOY SURVEYOR'S DOCUMENTATION DATED 16/11/06

CONTOURS INDICATE 250mm FALL

SEWER PITS SHOWN INDICATIVE ONLY - AS APPROXIMATED BY LAWLOR & LOY. BUILDER TO LOCATE PITS AND UNDERGROUND PIPES PRIOR TO COMMENCING WORKS

REFER TO ARBORICULTURAL REPORT BY RICHARD KELLAART - DATED 24/11/07- FOR INDIVIDUAL TREE DESCRIPTIONS AND LANDSCAPE PRESERVATION REQUIREMENTS

**Landscape Design**  
 LANDSCAPE WORKS INDICATED ON THIS PLAN ARE INDICATIVE ONLY AND NOT PART OF THIS CONTRACT. REFER TO THE LANDSCAPE ARCHITECT'S DRAWINGS FOR LANDSCAPE DETAILS



**Architect:**  
**Richard Peterson**  
 Architect  
 B. Arch (MBA) 20 Russell Street L +61 3 9499 1518  
 Dip Ed (MBA) Ivanhoe Victoria 3079 T +61 3 9499 9918  
 ICCROM Arch Cons (MBA) Australia  
 ARAIA  
 RIBA

**Designer:**  
**>>>STEVEN WALLIS**  
 Number 5 / 24 Leonard Street e steven.wallis@gmail.com  
 London EC2A 4BY m +44 75 6307 4600  
 United Kingdom abn: 94 597 684 603

**ALTERATIONS + ADDITIONS TO:**  
**WYSTISH**  
**20 RUSSELL STREET**  
**IVANHOE VICTORIA 3079**  
**FOR RICHARD PETERSON**  
**ARCHITECT**

**Drawing name**  
**PROPOSED WORKS:**  
**SITE PLAN**

Date	Scale	Sheet Size
27/10/2008	1:100	A1

Plotted	Drawn	Checked
8/3/2013	SW	RP

Job No.	Drawing No.	Revision
2502	A-005	A

